




LED QUICK SHIP PROGRAM

LED 450 WATT MULTI PURPOSE

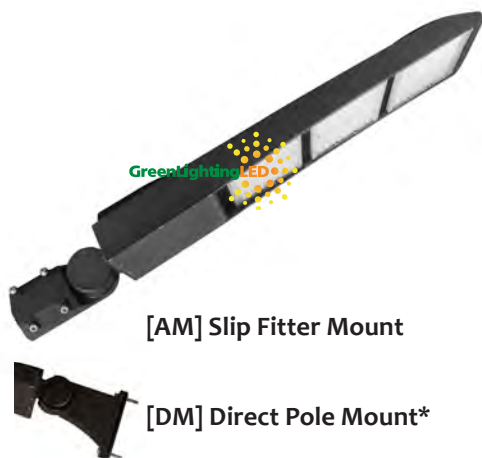

[AM] Slip Fitter Mount

[DM] Direct Pole Mount*

- NEW 450 watt model now available.
- 347-480V options available.
- DM mount *compatible with round and square pole applications.
- All models stocked with bronze housing.
- Increased 140 lm/watt efficacy on all models.
- cULus and DLC listed.



G07 SERIES



SPECIFICATIONS	
BEAM ANGLE	T3M
CERTIFICATIONS	cULus, DLC
CRI	>70
DIMMABLE	0-10V Dimming
LED TYPE	Seoul SMD3030
INPUT VOLTAGE	100~277V, 347~480V 50/60Hz
OPERATING TEMP	-40°F~122°F
POWER CONSUMPTION	450 Watt
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	6 Years
WATERPROOF	IP65 Wet Location

QUICK SHIP STOCK ORDERING

MODEL	VOLTAGE	LUMENS	BASE	CCT	WEIGHT (Net Gross)	DIMENSIONS
GLL-S-G07-450WCT3B1-BR10SPFM50	B1 = 120~277V	63,000 LM	FM = Trunnion	50 = 5000K	26.5 lbs 28 lbs	28.22"L x 13.74"W x 3.74"H
GLL-S-G07-450WCT3B1-BR10SPAM50	B1 = 120~277V	63,000 LM	AM = Slip Fitter	50 = 5000K	25.4 lbs 28 lbs	36"L x 13.39"W x 3.74"H
GLL-S-G07-450WCT3B1-BR10SPDM50	B1 = 120~277V	63,000 LM	DM = Direct Mount	50 = 5000K	27.6 lbs 29.1 lbs	35.82"L x 13.35"W x 6.3"H
GLL-S-G07-450WCT3H1-BR10SPFM50	H1 = 277~480V	63,000 LM	FM = Trunnion	50 = 5000K	26.5 lbs 28 lbs	28.22"L x 13.74"W x 3.74"H
GLL-S-G07-450WCT3H1-BR10SPAM50	H1 = 277~480V	63,000 LM	AM = Slip Fitter	50 = 5000K	25.4 lbs 28 lbs	36"L x 13.39"W x 3.74"H
GLL-S-G07-450WCT3H1-BR10SPDM50	H1 = 277~480V	63,000 LM	DM = Direct Mount	50 = 5000K	27.6 lbs 29.1 lbs	35.82"L x 13.35"W x 6.3"H

ORDERING GUIDE & EXAMPLE FOR STOCK INVENTORY: GLL-S-G07-450WCT3B1-BR10SPDM50

GLL = Green Lighting LED | S-G07 = Product Series | Wattage | C = Seoul Diodes | T3 = Viewing Optics | B1 = 120~277V | BR = Bronze Housing

10SP = 10KV Surge Protection | DM = Direct Mount | 50 = 5000K Color Temperature



- [PC] Photocell